


The Mini TCF

Building on the success of the TCF, the Mini TCF joins the range. Enabling quick and easy counting of smaller products such as Swing Tickets, Store/Credit Cards, Pouches and Sachets of variable and same thickness.



QUICK AND EASY SET-UP

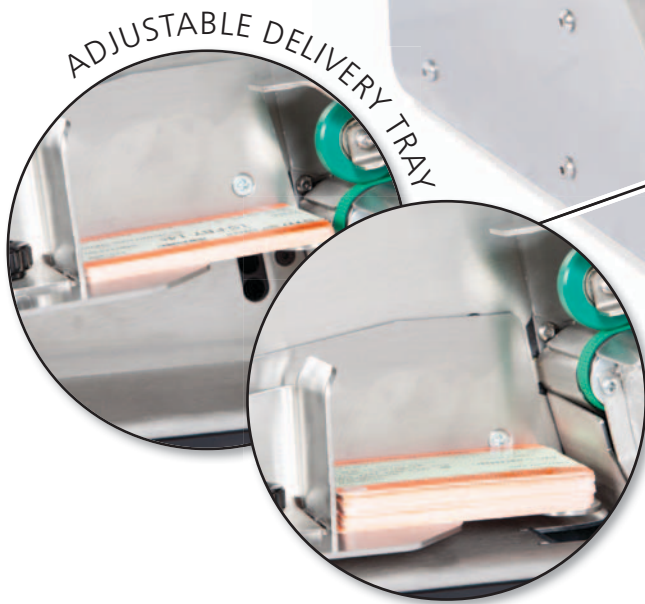

ADJUSTABLE DELIVERY TRAY



AUTOMATICALLY COMPENSATES FOR VARIABLE THICKNESS



ADJUSTABLE OPEN HOPPER FOR LOADING ON THE RUN



COUNTS A WIDE RANGE OF PRODUCTS

Versatility for
Counting Small Items of
Mixed and Same Thickness





Technical Information

All counting speeds, cycle times and paper weight ranges stated are the results of tests carried out under factory conditions. Actual results may vary depending on paper weight, quality and presentation. Other variables such as batch size may also affect performance.

Vacuomatic have made every effort to ensure the accuracy of the information contained within this brochure. Vacuomatic operate a research and development programme which drives continuous product improvement. The services and product specifications contained within this brochure may change without notice.

Overall Weight	15.8kg
Input Voltage Range	90-264 VAC, 47-63 Hz
Max. Input Current	1.0A at 115VAC 0.5A at 230VAC
No Load Input Power	less than 0.5W
Output Voltage	24 VDC
Width of Sheet Leading Edge	20 to 76mm
Length of Sheet in Direction of Feed	54 to 146mm
Batch Size	1 to 100 dependent on product thickness
Sheet Thickness	up to 2mm
Hopper Capacity Stack Height	185mm
Delivery Tray Capacity	50mm
Speed	The output belt speed of the feeder is operator adjustable up to 1.3m/s

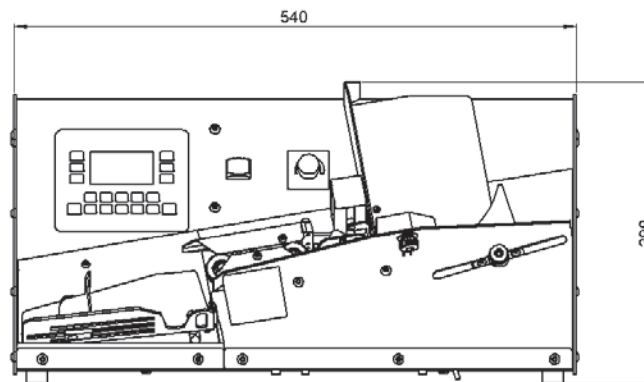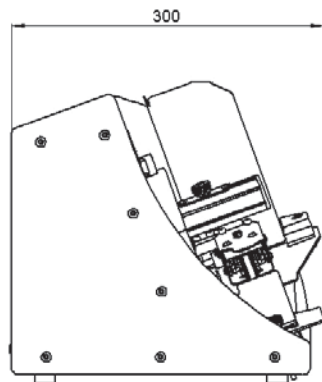

Vacuomatic Ltd.

8 Brunel Way, Colchester, Essex, CO4 9QX, United Kingdom
 Tel: +44 (0)1206 841100 Fax: +44 (0)1206 841166
 Email: enquiries@vacuomatic.com

Vacuomatic Maschinen GmbH.

Emmericher Str. 31, D-46485 Wesel, Germany
 Tel: +49 (0)281 33995 0 Fax: +49 (0)281 33995 20
 Email: info@vacuomatic.de

www.vacuomatic.com

